

Design on a fine temperature control device for carrier heating about biomass pyrolysis fuel

Liu xin¹ *Wangshuyang², Sunbingxiao³ Xueguolei⁴, Caoyouwei⁵

^{1,2,3,4,5}Northeast Forestry University, Harbin 150040, P.R.China
Nefu_lx@163.com

Abstract: With the rapid development of biomass pyrolysis fuel technology, the technology about heating through heat-carrier as an important part of biomass pyrolysis fuel process is also to mature. However, since there is a relatively great temperature difference after carrier heating, the biomass pyrolysis products and oil production rate are affected ultimately. Therefore, this article first introduces several kinds of biomass pyrolysis fuel technology about heating through heat-carrier, and then leads to a design of a fine temperature control device through analysis and comparison to keep the initial temperature difference within ± 10 °C for the carrier in main reactor so that it can satisfy the temperature demand of biomass pyrolysis and promote the industrialization of biomass pyrolysis fuel.

Keywords: Biomass pyrolysis fuel technology; Heating technology; Fine temperature control device; Carrier; The initial temperature difference;

1 Research status of biomass pyrolysis fuel technology about heating through heat-carrier

With the rapid development and industrialization of biomass pyrolysis fuel technology, biomass pyrolysis fuel equipments have also been developing rapidly, among which the carrier heating device as the key technology of biomass pyrolysis fuel also experienced the progress of carrier from gas to solid.

1.1 Gas heat-carrier –the indirect heating furnace with circulating air-duct

Figure 1 shows the heating program that the heating device regards air as the carrier to transfer heat. When the operation starts, the heating furnace (5) begins to heat. When the furnace temperature reaches the predetermined temperature, open the fan (6) to start hot-air circulation. During the process that hot air is circulating in the hot-air duct (2), just heat the inner wall of the main reactor to increase the internal temperature of the main

reactor. As the rotating cone (3) is also heated to a certain temperature, the heat-carrier will be able to reach the required temperature after several cycles in the main reactor.¹

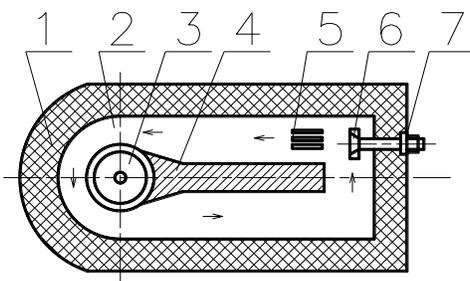


Fig. 1 Schematic Diagram of a heating furnace with circulating air-duct
1. Insulation 2. Hot-air duct 3. Rotating cone 4. Interlayer between hot-air duct
5. Heating furnace 6. Fan 7. Cooling Hinge

During the process, the indirect heating furnace with circulating air-duct reveals some shortcomings such as slow heating rate, long heating time and unstable temperature. Moreover, the fan life is shortened dramatically due to the high operating temperature which is generally above 800 °C. Thus it is unfavorable for stable production in the long term.

1.2 Solid heat-carrier – the compound heating furnace

The high-speed and efficient compound heating furnace is mainly composed of an upper furnace and a lower furnace, and its structure is shown in Figure 5. During the carrier-heating process, the hot smoke released by the burner first enters the lower furnace (4) and then moves to the heating pipe (2) of the upper furnace (1) through the connecting conduit (3) between the two furnaces. Carrier goes into the upper furnace through the heat-carrier inlet device (10) and then exchanges heat with the smoke by the heating pipe. Afterwards, carrier moves to the lower furnace (4) to convert heat with the smoke directly. The flow of carrier can be commanded by a flow control valve (8). A tilting baffle (7) is installed at the lower furnace so that the heat carrier can fully contact with the hot smoke.

corresponding author: Wangshuyang

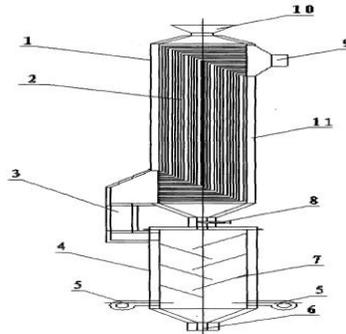


Fig. 5 Chart of the compound heating furnace

1. Upper furnace
2. Heating pipe
3. Connecting conduit
4. Lower furnace
5. Burner
6. Heat-carrier outlet device
7. Tilting baffle
8. Flow control valve
9. Flue
10. Heat-carrier inlet device
11. Insulation

With the further development of biomass pyrolysis fuel technology and the improvement of biofuel quality, the reacting temperature in the main reactor needs to be as accurate as possible, which requires precise control of the carrier temperature after heating. Therefore, it is necessary to design the fine temperature control device.

2 The design of the fine temperature control device

2.1 The basic principles of fine temperature control device

The fine temperature control device is installed between the carrier outlet of the furnace and carrier inlet of the main reactor. When the temperature of heat-carrier changes, feedback signals from the thermocouple bring in the condition machine through the analog input, calculated by the PID controller, via I / O output to control the high-frequency power swift so as to regulate the heating temperature of the carrier. (Figure 7)

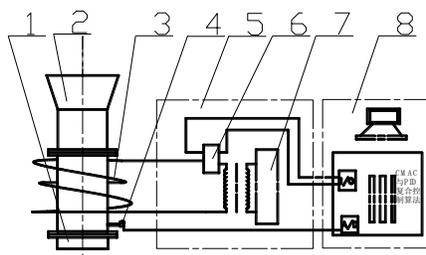


Fig. 7 Fine temperature control device

1. IPC 2. high-frequency generator 3. Solid State Relays 4. High-frequency power 5. Thermocouple
6. heating pipe 7. carrier outlet of the furnace 8. carrier inlet of the main reactor

The basic method of the high-frequency heating for carrier is as followings. First put the carrier into the electromagnetic induction coil, then electrify it by some certain alternating current to generate a magnetic field so that some closed induced currents will be produced within the carrier under the effect of electromagnetic induction in the alternating magnetic field. Meanwhile, the surface temperature of carrier will rise since energy from the high-density current on the surface layer of carrier is converted to heat.

2.2 Calculation of the fine temperature control device theory

Known the mixing ratio between the amount of carrier and dry biomass is 1:10. [4] The moisture content of the biomass feedstock is 10%, and the required amount of biomass pyrolysis is 300kg per hour along with the specific heat of carrier as 1.005J / g °C and the density as 1500 ~ 1700kg / m³. According to the cracking experiment for pyrolysis fuel equipments, generally the temperature of carrier from the furnace is only about 540 °C. In order to achieve pyrolysis temperature, the needed temperature of carrier is 560 °C so that the requirement for the amount of heat can be calculated as follows:

$$Q = Cm\Delta t$$

In the formula, Q—the needed quantity of heat for carrier heating, KJ / h;

C—the specific heat capacity of carrier, 0.24cal / g °C;

m—the mass of the carrier, g;

Δt —the temperature difference for carrier heating, °C.

The above shows that the demand for the amount of carrier is 3×10^4 kg and the temperature difference is 20 °C. When leading these numbers into the formula, the result is that Q is 60.48 KJ / h. Since the rate of heat loss during the transfer process is 10%, actually the needed quantity of heat for carrier heating is 66.5 KJ / h.

Since the device is connected to the outlet of the furnace, the outlet D_0 is 60mm according to the design. In order to ensure a carrier flow of 2.144kg / s, the inner tube D_1 should be 50mm. The outer tube D_2 can be calculated by the following formula:

$$\frac{1}{4} \times \pi (D_2^2 - D_1^2) = \frac{1}{4} \times \pi D_0^2$$

The result shows that D_2 is 78mm. According to the Mechanical Design Handbook, D_2 can be set up as 83mm, along with the thermal conductivity λ as 0.45 w / m · k [5].

According to the "Principles of Chemical Engineering", the relationship between the length of tube and the heat is as follows:

$$Q = \frac{2\pi \lambda L \Delta t}{\ln \frac{r_1}{r_2}}$$

In the formula, Q—the needed quantity of heat for carrier heating, KJ / h;

Δt —the temperature difference for carrier heating, °C.

λ —the thermal conductivity, 0.45 w / m · k ;

L—the length of tube, mm;

r_1 —the radius of the inner tube, mm;

r_2 —the radius of the outer tube, mm;

According to the known data, the result shows that L is 1000 mm. In order to ensure a constant temperature rising, a layer of relatively soft asbestos with mica flakes fixed as outer insulation is added to the outer wall of the tube.

3 Summary

This paper describes heating technology during the biomass pyrolysis fuel process, which yields a result that almost all kinds of heating methods are hard to ensure the final heating temperature of carrier to reach 560 °C , as the heating temperature is generally about 540 °C. Therefore, a fine temperature control device is designed by analyzing its operating principles, structures and theoretical calculation process. Ultimately, the device can control the initial temperature difference within ± 10 °C since the temperature of carrier is increased by 20 °C.

References

1. Sunyongxiang. Status, Problems and Prospects of Sino-Russian Energy Cooperation [J] International Outlook, 2012,02: 48-66 + 135.
2. Chang Jie. Key Issues and Prospects for the Development of Biomass Gasification Power Generation [J] Power Construction, 2009,06: 1-5.
3. Dong Zhiguo, Wang Shuyang, Li Bin. Experimental Study of Rotating Cone Biomass Pyrolysis Liquefaction Device [J] Forestry Machinery & Woodworking Equipment, 2004,04: 17-19.
4. Liu Xiangdong. Research on the Design Theory of Key Device for Fluidized Self-heating Biofuels [D]. Northeast Forestry University, 2011.
5. Wen Bangchun. Mechanical Design Handbook 5th Edition [M] Beijing: Mechanical Industry Press .2014.